


Closed Loop Auger System



The CHORE-TIME® MULTIFLO® Feed Delivery System has a reputation for gentle handling of feed and feed pellets for sow gestation, farrowing and nursery units. This innovative closed-loop coreless auger system uses the same long-lasting high-tensile strength steel auger as the famous CHORE-TIME® FLEX-AUGER® Conveying System. However, instead of rotating the auger, the MULTIFLO System simply slides the auger within the tube. Reliable and simple to manage, the MULTIFLO System also eliminates corner wheels and high-maintenance parts some other recirculating systems may require.

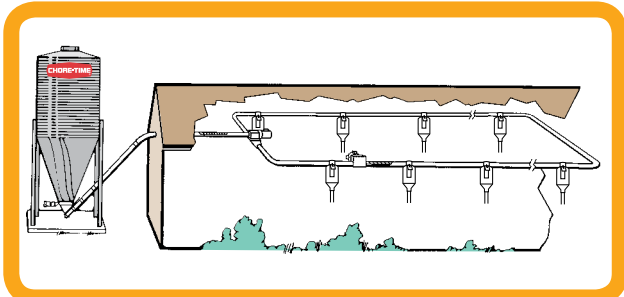

MULTIFLO® Feed Delivery System for farrowing or gestation.

Product Features and Advantages

- Choose from three MULTIFLO® Systems:
 - Standard MULTIFLO System for pig and other layouts requiring closed-loop feed delivery systems with multiple corners.
 - High-Speed MULTIFLO System for delivering up to 50 pounds (20 kg.) of feed per minute.
 - Tight-Radius MULTIFLO System for use in farrowing rooms and other tight spaces where sharp 180-degree turns are desired for standard 36-inch (914-mm) wide aisles.
- Designed to accurately distribute feed and to help contribute to optimum conversion.
- Reliable, long-lasting, closed-loop steel auger system carries a limited 1-year warranty on the elbows and auger. (See the full written warranty from PigTek for complete details.)
- Auger tube elbows are pre-formed for added durability in making turns.
- Easy-to-use auger connector makes quick work of installing the auger loop.
- The energy-efficient direct drive power unit attaches to any straight section of auger tubing.



MULTIFLO® Drive Gear



PIGTEK® DOSFLOW™ Sow Feed Dispenser



Feed Level Control



CHORE-TIME® Portion Control Feeder



MULTIFLO® Inspection Window

MULTIFLO® System Specifications

Feed Delivery System	Tube Outside Diameter inch/mm	Corner Radius inch/mm	Maximum Length feet/meters	Motor Size Recommended at Maximum Length HP	Feed Delivery Rate lb/min.-kg/min.	Typical Applications
Standard Model	2.25 in. 55 mm	24 in. 610 mm	1080 ft. 330 m (with 4 elbows)	(3) 1/2	15-20 lbs. 7-9 kg	Multiple corners for pig or other operations
Tight-Radius Model	2.25 in. 55 mm	180° turn 39 in. 990 mm (loop width)	1080 ft. 330 m (with 2 elbows)	(3) 1/2	15-20 lbs. 7-9 kg	Sharp, 180° turns for pig farrowing rooms with 36-in. (914-mm) wide aisles
High-Speed Model	2.25 in. 55 mm	24 in. 610 mm	1080 ft. 330 m (with 4 elbows)	(3) 3/4	50 lbs. 20 kg	Multiple corners, high feed volume for pig or other operations

For the distributor nearest you, call the PigTek Customer Fulfillment Department at 800-341-1039 or use the Distributor Finder on www.PigTekAmericas.com.



PigTek Pig Equipment Group
A Division of CTB, Inc.
Milford, IN USA
Call 800.341.1039 or 574.658.4101
PigTek.net or choretimehog.com
info@PigTek.net

Feed delivery rate is calculated at a standard of 40 pounds of feed per cubic foot (640 kilograms per cubic meter) at 348 RPM.